

PRODUCT INFORMATION

RADILON S RV300 333 BK

DESCRIPTION

PA6 30% glass fiber reinforced injection moulding grade. Black colour.

Suitable for parts requiring high stiffness and good mechanical resistance.

ISO 1043: PA6 GF30

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.15%. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature
240 - 280°C

Mold Temperature
80 - 90°C

Injection Speed
medium-high

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet
ROHS compliant 2011/65/UE and following amendments

TECHNICAL DATA SHEET

RADILON S RV300 333 BK

PROPERTY	STANDARD	UNIT	VALUE	DAM*	Cond**
PHYSICAL PROPERTIES					
Density				1350	
Moulding shrinkage - Parallel / Normal	280 / 90 / 60 ^[1]	ISO 1183	kg/m ³	0.3 / 0.8	
Water Absorption, immersion at 23°C	2mm	ISO 294-4	%	7.5	
Moisture Absorption 23°C - 50%RH	2mm	ISO 62	%	2	
MECHANICAL PROPERTIES					
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	9600	6600
Stress at Break	5mm/min	ISO 527-2/1A	MPa	173	110
Strain at Break	5mm/min	ISO 527-2/1A	%	3.2	4.8
Flexural Modulus	2mm/min	ISO 178	MPa	8550	
Flexural Strength	2mm/min	ISO 178	MPa	250	
Charpy Impact Strength	+23°C	ISO 179/1eU	kJ/m ²	73	
Charpy Impact Strength	-30°C	ISO 179/1eU	kJ/m ²	65	
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m ²	11	
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m ²	9	
THERMAL PROPERTIES					
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	220	
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	200	
Heat Deflection Temperature	0.45 MPa	ISO 75/2Bf	°C	215	
Vicat Softening Temperature	50°C/h 50N	ISO 306	°C	210	
FLAMMABILITY PROPERTIES					
Flammability	0.8mm	UL 94	class	HB	
Glow Wire Flammability Index	2mm	IEC 60695-2-1/2	°C	650	
Automotive Interior Flammability	3mm	ISO 3795	mm/min	0	
ELECTRICAL PROPERTIES					
Volume Resistivity	500V	IEC 60093	Ohm*m	1E13	1E11
Surface Resistivity	500V	IEC 60093	Ohm	1E12	1E10
Comparative Tracking Index	Sol.A	IEC 60112	-	500	


*: DAM = Dry As Moulded state according to ISO 16396-2 **: Cond = Conditioned state similar to ISO 1110 1: Melt Temperature [°C] / Mold Temperature [°C] / Cavity Pressure [MPa]

TECHNICAL DATA SHEET


RADILON S RV300 333 BK

Diagrams


Viscosity-shear rate

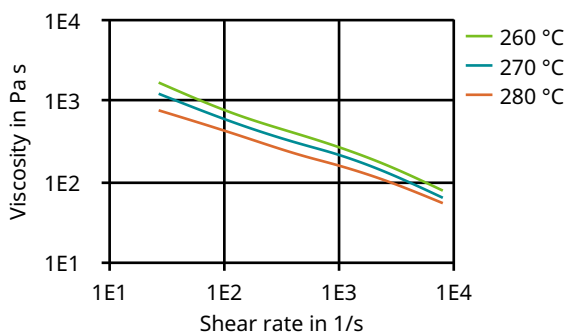


Shearstress-shear rate

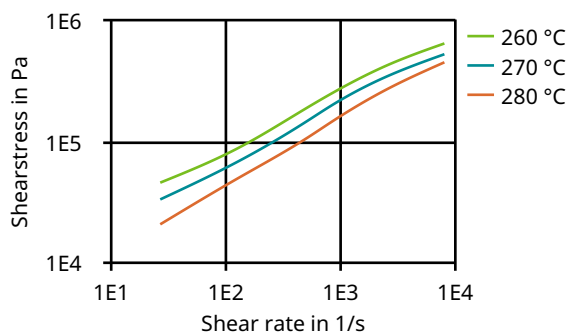

Stress-strain (dry)

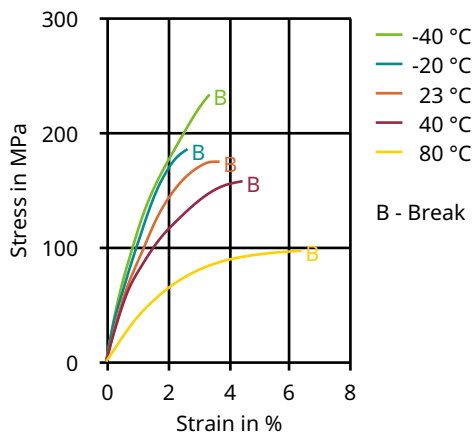

Stress-strain (cond.)


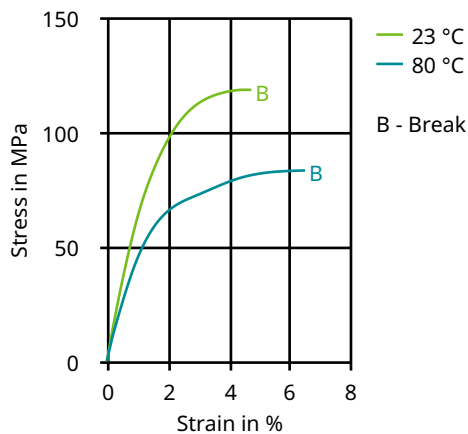


TECHNICAL DATA SHEET

RADILON S RV300 333 BK

Secant modulus-strain (dry)

Secant modulus-strain (cond.)

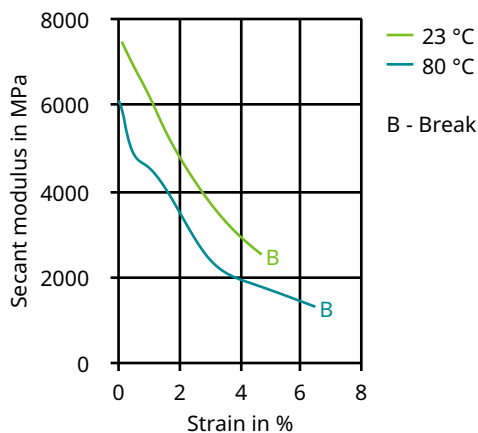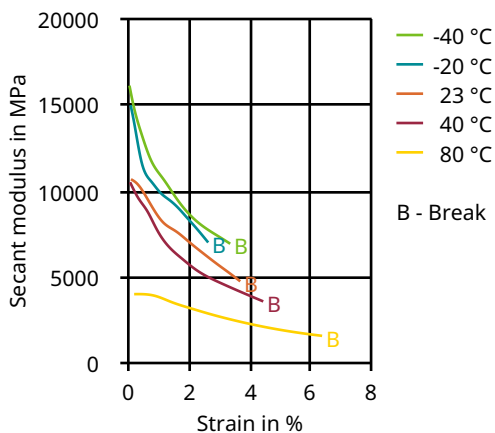

Specific volume-temperature (pvT)

