

RADIFLAM A FR 100 NT

DESCRIPTION

PA66 flame retardant injection moulding grade. Halogen and phosphorus free. Natural colour.

Suitable for parts where fire retardancy is required, particularly for thin-walled items or with long flow paths. Rated V-0 at 0.4 mm according to UL-94.

ISO 1043: PA66 FR(30)

REGIONAL AVAILABILITY: North America, Europe, Asia Pacific, South and Central America, Near East/Africa

MATERIAL HANDLING AND PROCESSING

The material is delivered in moisture-proof packaging ready for processing. Maximum recommended water content for best processing is 0.10%. Typical conditions with a desiccant drier: temperature 80 ° C, dew point -20 ° C or below, time 2-4 h or more. Avoid excessive shear rates and high thermal stresses for better processing. Special care must be taken to avoid moisture absorption and contamination with other polymers when adding regrind material. Colour variation and mechanical properties reduction may occur and should always be carefully monitored.

Injection Molding Processing Parameters

Melt Temperature

270 - 290°C

Extrusion Temperature

270 - 290°C

Mold Temperature

60 - 80°C

Injection Speed

medium

PRODUCT SAFETY AND APPROVALS

For safety instruction please refer to Material Safety Data Sheet

Underwriters Laboratories Inc. certified material www.ul.com

ROHS compliant 2011/65/EU and following amendments

RADIFLAM A FR 100 NT

PROPERTY	STANDARD	UNIT	VALUE		
			DAM*	Cond**	
PHYSICAL PROPERTIES					
Density		ISO 1183	kg/m³	1170	
Moulding shrinkage - Parallel / Normal	280/70/60 [1]	ISO 294-4	%	1.1 / 1.1	
Water Absorption, immersion at 23°C	2mm	ISO 62	%	7.7	
Moisture Absorption 23°C - 50%RH	2mm	ISO 62	%	1.8	
MECHANICAL PROPERTIES					
Tensile Modulus	1mm/min	ISO 527-2/1A	MPa	3500	2600
Stress at Yield	50mm/min	ISO 527-2/1A	MPa	75	50
Yield Strain	50mm/min	ISO 527-2/1A	%	4.5	4
Nominal Strain at Break	50mm/min	ISO 527-2/1A	%	10.5	>50
Flexural Modulus	2mm/min	ISO 178	MPa	3300	
Flexural Strength	2mm/min	ISO 178	MPa	110	
Charpy Impact Strength	+23°C	ISO 179/1eU	kJ/m²	75	120
Charpy Notched Impact Strength	+23°C	ISO 179/1eA	kJ/m²	4.5	6.5
Charpy Notched Impact Strength	-30°C	ISO 179/1eA	kJ/m²	4	
THERMAL PROPERTIES					
Melting Temperature	10°C/min	ISO 11357-1/-3	°C	260	
Heat Deflection Temperature	1.80 MPa	ISO 75/2Af	°C	70	
Heat Deflection Temperature	0.45 MPa	ISO 75/2Bf	°C	200	
Vicat Softening Temperature	50°C/h 50N	ISO 306	°C	220	
FLAMMABILITY PROPERTIES					
Flammability	0.4mm	UL 94	class	V-0	
Flammability	0.8mm	UL 94	class	V-0	
Glow Wire Flammability Index	1mm	IEC 60695-2-12	°C	960	
Glow Wire Flammability Index	2mm	IEC 60695-2-12	°C	960	
Glow Wire Ignition Temperature	1mm	IEC 60695-2-13	°C	>775	
Glow Wire Ignition Temperature	2mm	IEC 60695-2-13	°C	>750	
Automotive Interior Flammability	3mm	ISO 3795	mm/min	0	
Limiting Oxygen Index	23°C	ISO 4589-2	%	35	
ELECTRICAL PROPERTIES					
Volume Resistivity	500V	IEC 62631-3-1	Ohm*m	1E13	1E11
Surface Resistivity	500V	IEC 62631-3-2	Ohm	1E12	1E10
Electric Strength		IEC 60243-1	kV/mm	31	26
Comparative Tracking Index	Sol.A	IEC 60112	V	600	
RAILWAY APPLICATION					
Ds max Specific Smoke density - 25kW/m2 w/ pilot flame	1mm	EN ISO 5659-2	-	35	
ClTnlp Conv. Index of Toxicity - Not listed product (600°C)		NF X70-100-1/2	-	0.45	
EN 45545-2 classification	1mm	EN 45545-2	-	R23 HL3	
NF Classification		NF F16-101	-	I2 /	
AGEING PROPERTIES					
TI at 50% loss of Tensile Strength	5000h	ISO 2578	°C	151	
TI at 50% loss of Tensile Strength	20000h	ISO 2578	°C	121	
TI at 50% loss of Dielectric Strength	5000h	ISO 2578	°C	186	
TI at 50% loss of Dielectric Strength	20000h	ISO 2578	°C	134	


*: DAM = Dry As Moulded state according to ISO 16396-2, **: Cond = Conditioned state similar to ISO 1110

1: Melt Temperature [°C] / Mold Temperature [°C] / Cavity Pressure [MPa]


RADIFLAM A FR 100 NT

DIAGRAMS


Viscosity-shear rate

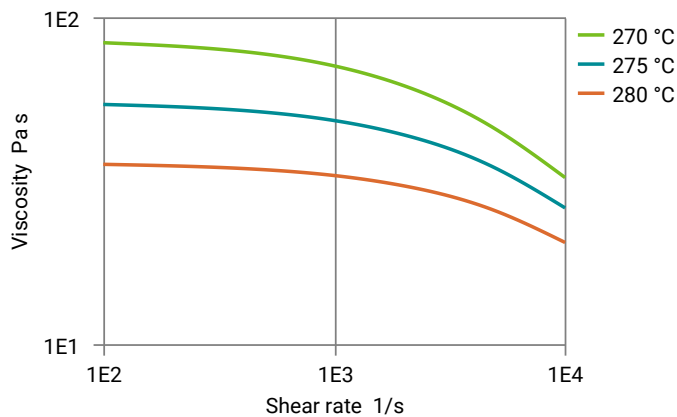


Shearstress-shear rate

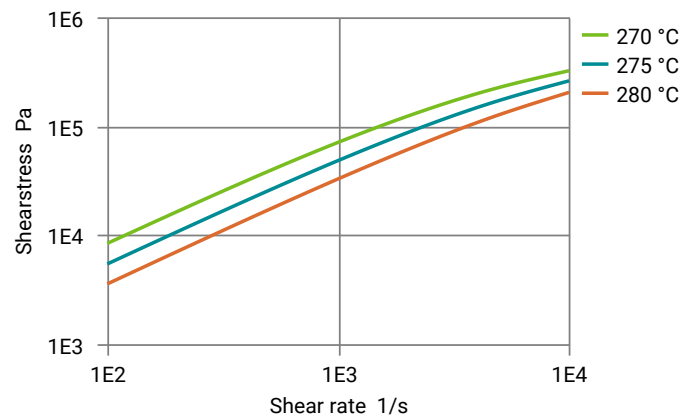

Stress-strain (dry)

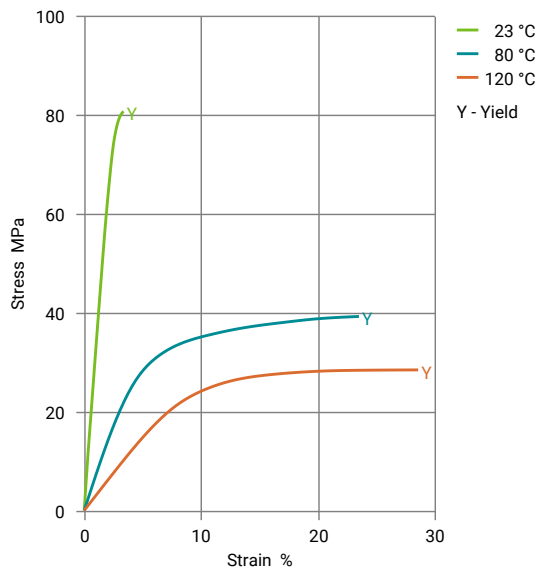

Secant modulus-strain (dry)

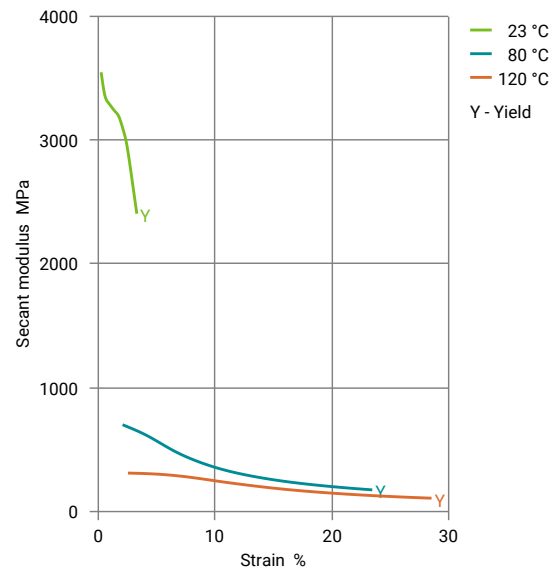

RADIFLAM A FR 100 NT

Specific volume-temperature (pvT)

